



## Useful information about fastening


### Fastening points for plugs and screws

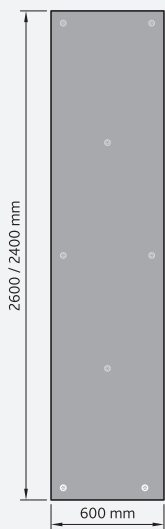

Fastening points for gluing with mortar and metal dowels at appropriate points. Construction board thickness at least 20 mm.

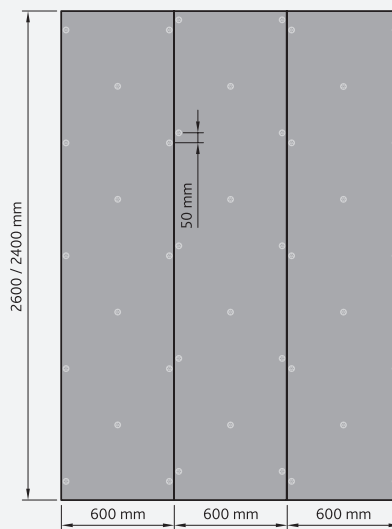


Fastening points for use on a stud frame with 300 mm stud spacing. Construction board thickness at least 10 mm.

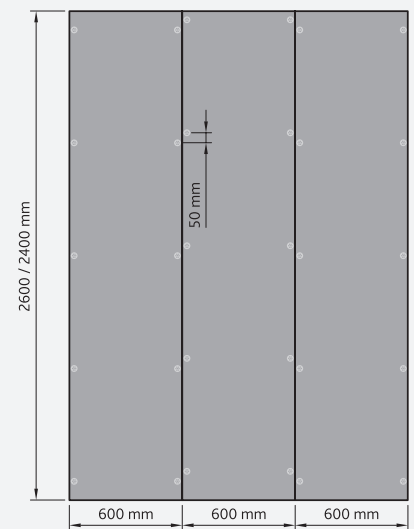

Fastening points for use on a stud frame with 600 mm stud spacing. Construction board thickness at least 20 mm.

### Floor heating systems

Electric heating mats can be directly installed on the construction board. The excellent insulation prevents heat from being emitted downwards. More heat is conducted directly into the room, and the heating system operates more effectively and economically. Please ensure that the application limit temperature of the Qboard® construction board of 75° C is not exceeded.

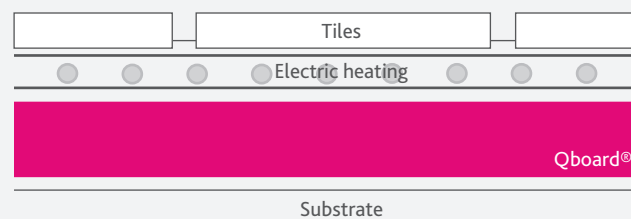

### General attachments

Attachments such as towel holders or trim must be installed through the construction board into a solid structure.

